

Now Available: G-Jib®



G-Force® Integrated Into a Work Station Jib


Gorbel is pleased to offer the G-Jib®, a fusion of the G-Force® Intelligent Lifting Device and the enclosed track work station jib crane. The G-Jib® delivers servo-powered lifting and easy movement without the dead weight of a hoist by mounting the actuator of the G-Force® near the mast of the jib.

With capacities to 660 pounds and spans to 16 feet, the G-Jib® expands application potential for jib-based Intelligent Lifting Devices. The G-Jib® is also a high performance, cost-effective alternative to a work station jib with a chain hoist.

Pinpoint Precision: The G-Jib® delivers unmatched precision throughout its full range of speed. This gives the operator the control necessary to finesse expensive or fragile parts.

Infinite Speed Control: The G-Jib® moves with the motion of the operator, going as fast or as slow as the operator chooses to move. It is ideal for lifting applications that require high speed at some points in the cycle and slow, precise movements at other points.


Easy Movement: Gorbel's enclosed track work station jib cranes are easier to move and position than traditional I-beam jibs. The cold-formed, high

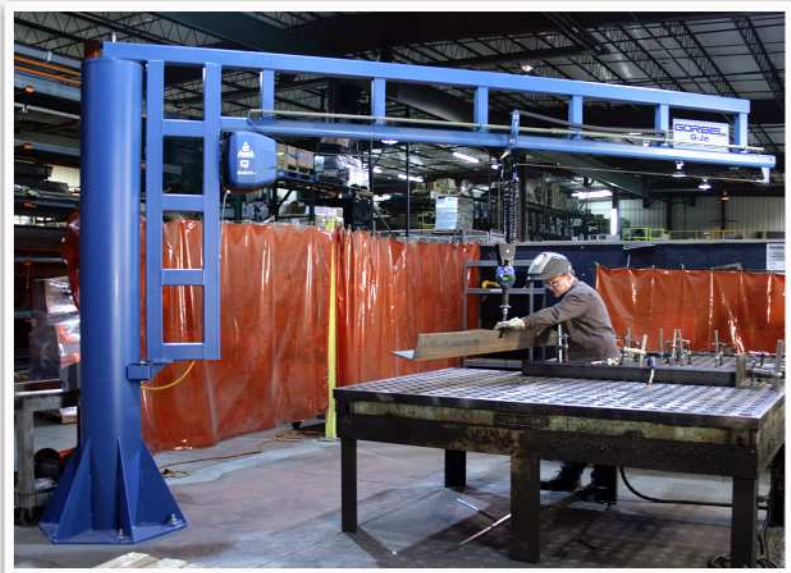

strength enclosed track design keeps rolling surfaces clean, which contributes to easier movement and longer life.

Float Mode Option: As with all other G-Force® products, the G-Jib® can be equipped with Float Mode. With Float Mode engaged, operators can apply a very slight amount of force onto the load itself to precisely orient loads with both hands throughout the full stroke range.


Safety Features: Anti-Recoil Technology, Capacity Overload, Power Loss Protection, Operator Present Function.

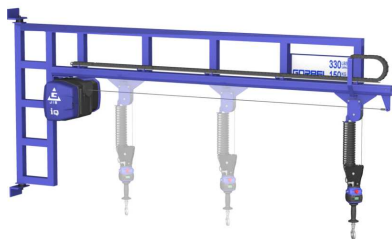


The G-Jib® is available as freestanding or wall-mounted in spans to 16 feet.

G-Jib®	330	660
Maximum Capacity (Load & Tool)	330 lbs	660 lbs
Maximum Lifting Speed Unloaded	90 fpm	45 fpm
Maximum Lifting Speed Fully Loaded	62.5 fpm	37.5 fpm
Maximum Float Mode Lifting Speed	51.5 fpm	32.5 fpm
Maximum Lift Range	5.5 ft	5.5 ft
Maximum Lift Stroke	5.5 ft	5.5 ft

Capacity	HUH	Span	HUB	A	B	C
330#	6'	6'	9.23'	10.25'	35.63"	23.31"
		8'	9.23'	10.50'	38.63"	44.31"
		10'	9.23'	10.50'	40.63"	66.25"
		12'	9.23'	10.75'	43.63"	87.25"
		14'	9.23'	10.92'	44.13"	110.75"
		16'	9.23'	10.92'	44.13"	134.75"
	8'	6'	11.23'	12.25'	35.53"	23.31"
		8'	11.23'	12.50'	38.53"	42.25"
		10'	11.23'	12.50'	40.50"	66.25"
		12'	11.23'	12.75'	40.50"	87.25"
		14'	11.23'	12.92'	44.13"	110.75"
		16'	11.23'	13.01'	44.13"	134.13"
	10'	6'	13.23'	14.25'	35.53"	21.25"
		8'	13.23'	14.50'	38.53"	42.25"
		10'	13.23'	14.50'	40.50"	66.25"
		12'	13.23'	14.75'	40.50"	87.25"
		14'	13.23'	14.92'	44.13"	110.75"
		16'	13.23'	15.01'	44.13"	134.13"

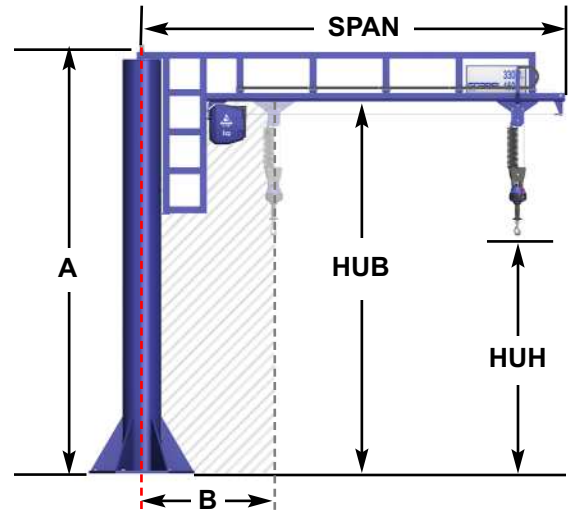

Capacity	HUH	Span	HUB	A	B	C
660#	6'	6'	9.23'	10.26'	37.63"	21.25"
		8'	9.23'	10.51'	40.63"	42.25"
		10'	9.23'	10.76'	43.63"	63.25"
		12'	9.23'	10.92'	43.63"	87.25"
		14'	9.23'	11.13'	47.12"	108.13"
		16'	9.23'	11.13'	47.12"	132.13"
	8'	6'	11.23'	12.26'	37.50"	21.25"
		8'	11.23'	12.51'	40.50"	42.25"
		10'	11.23'	12.76'	43.50"	63.25"
		12'	11.23'	12.92'	43.50"	87.25"
		14'	11.23'	13.13'	47.13"	108.13"
		16'	11.23'	13.13'	47.13"	131.13"
	10'	6'	13.23'	14.26'	37.50"	21.25"
		8'	13.23'	14.59'	40.50"	41.63"
		10'	13.23'	14.84'	43.50"	62.63"
		12'	13.23'	15.01'	43.50"	86.63"
		14'	13.23'	15.13'	47.13"	108.13"
		16'	13.23'	15.13'	47.13"	131.13"

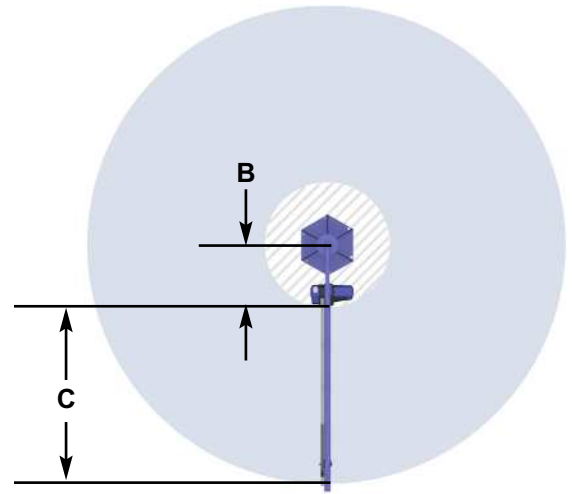

Please note: These dimensions are for the freestanding G-Jib units with inline slide handle only, and are subject to change. Units with other handle configurations will have different dimensions. Please contact Gorbel at (800) 821-0086 for additional dimensions.

Slide Handle	Remote Pendant	Remote Slide	Suspended Pendant
D 38.75"	D 29.75"	D 29.75"	D 25.75"